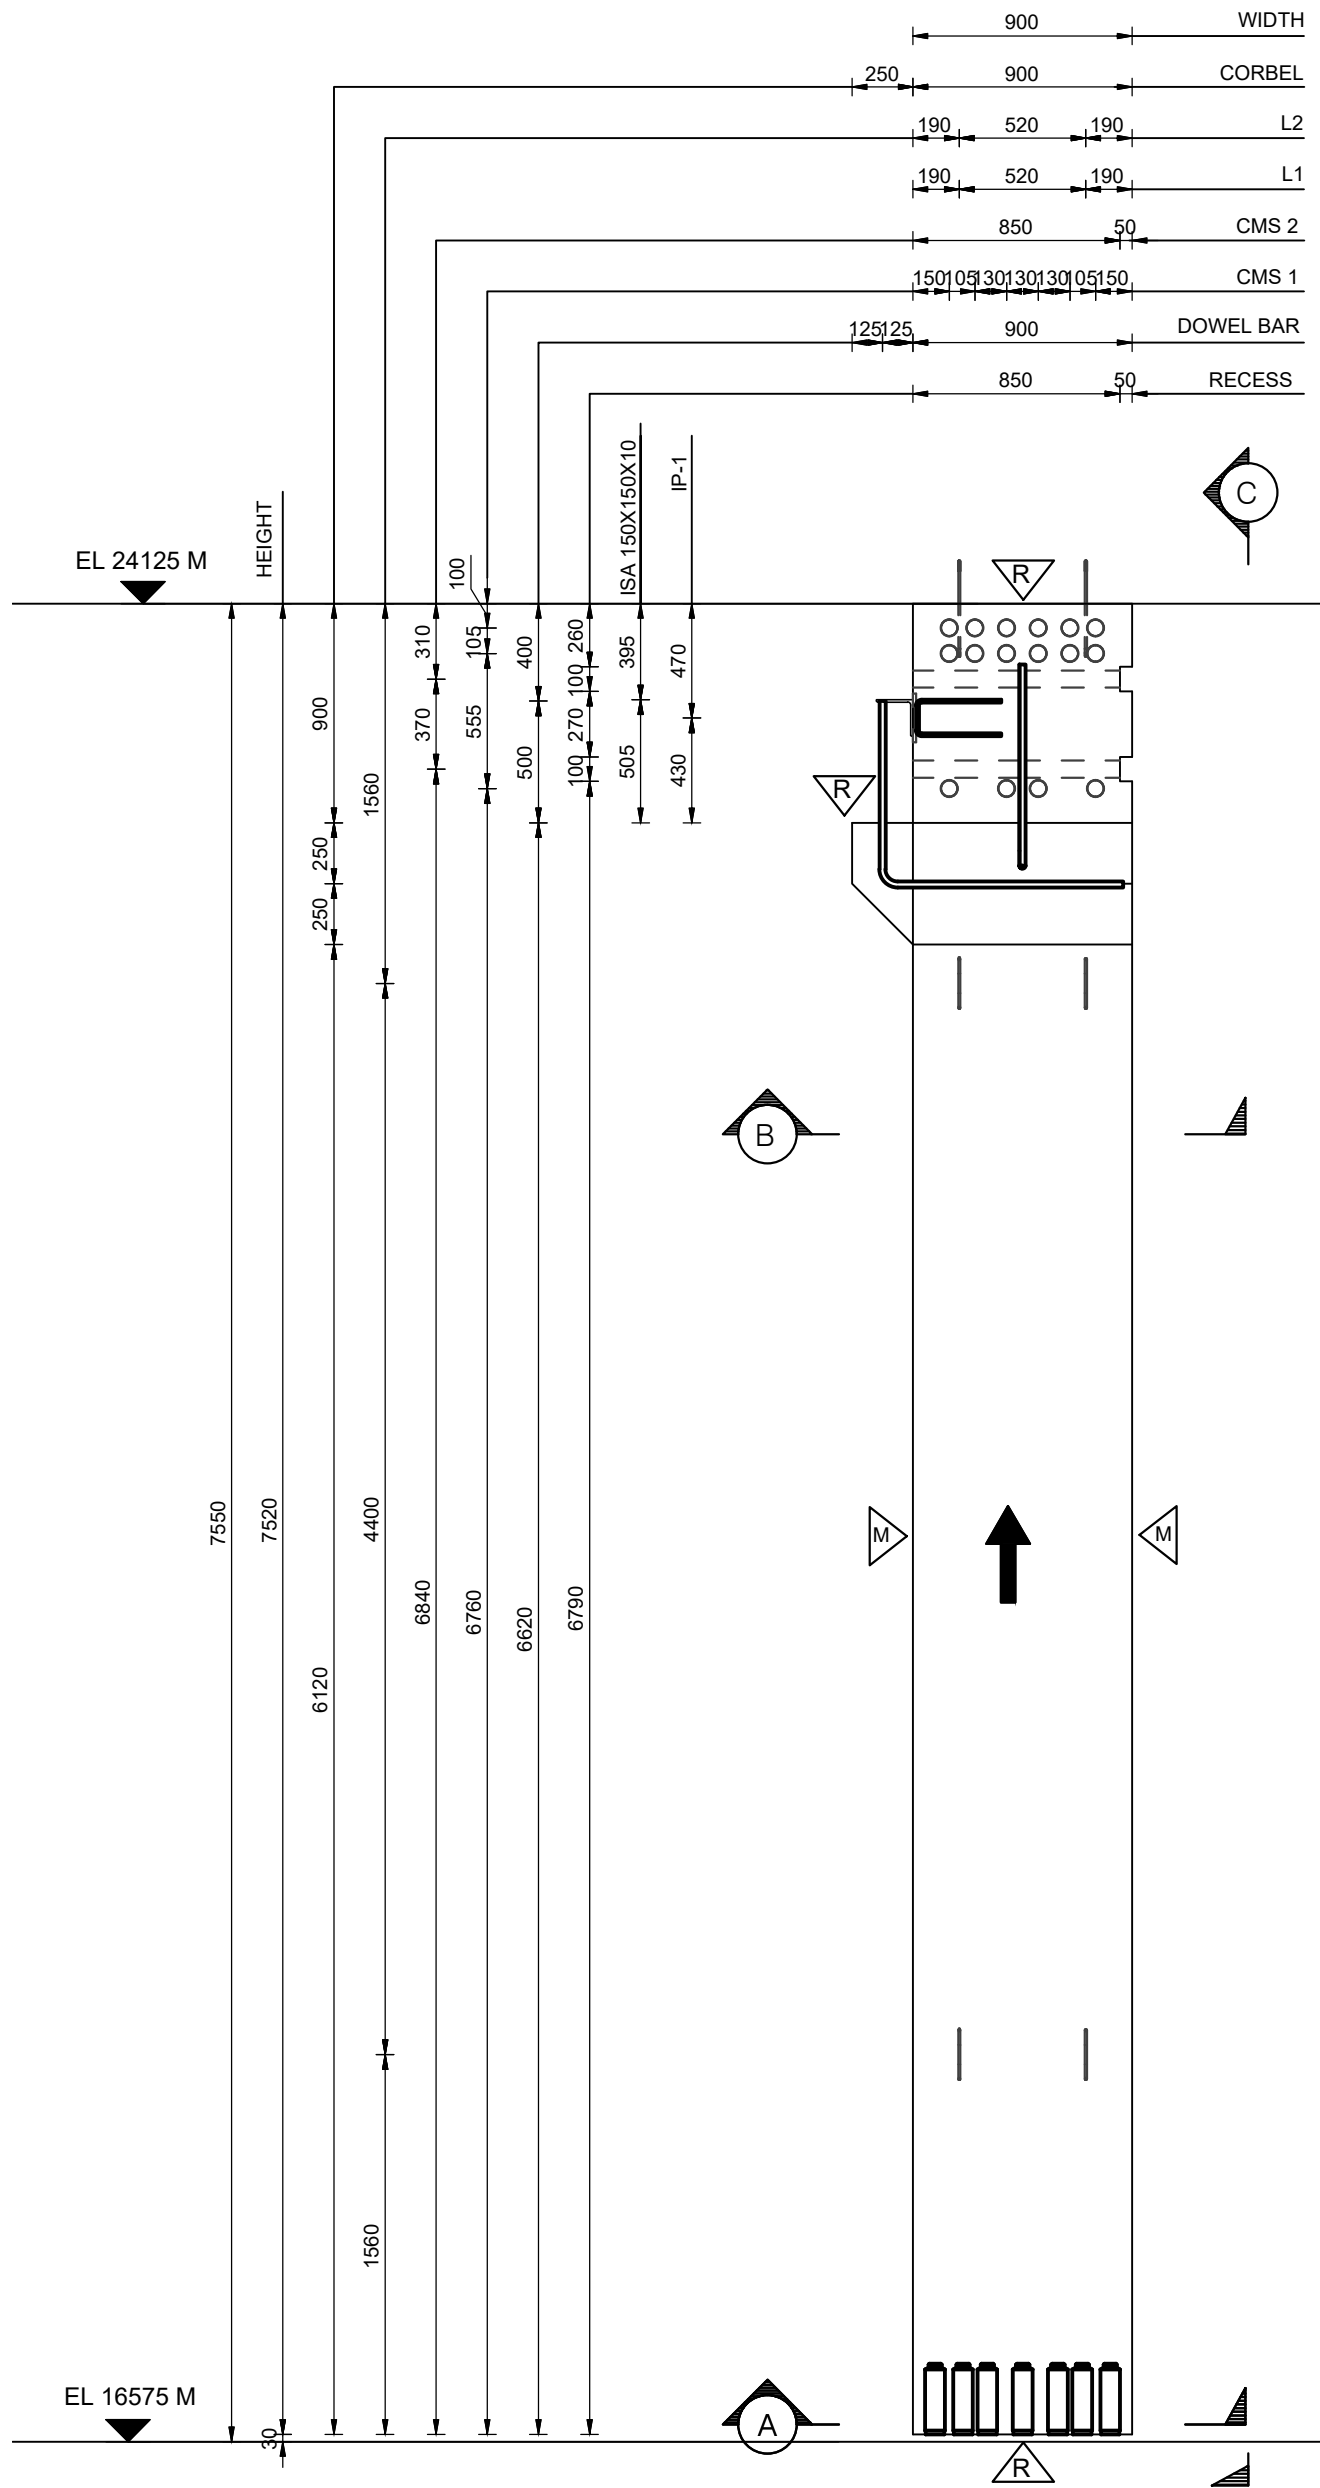
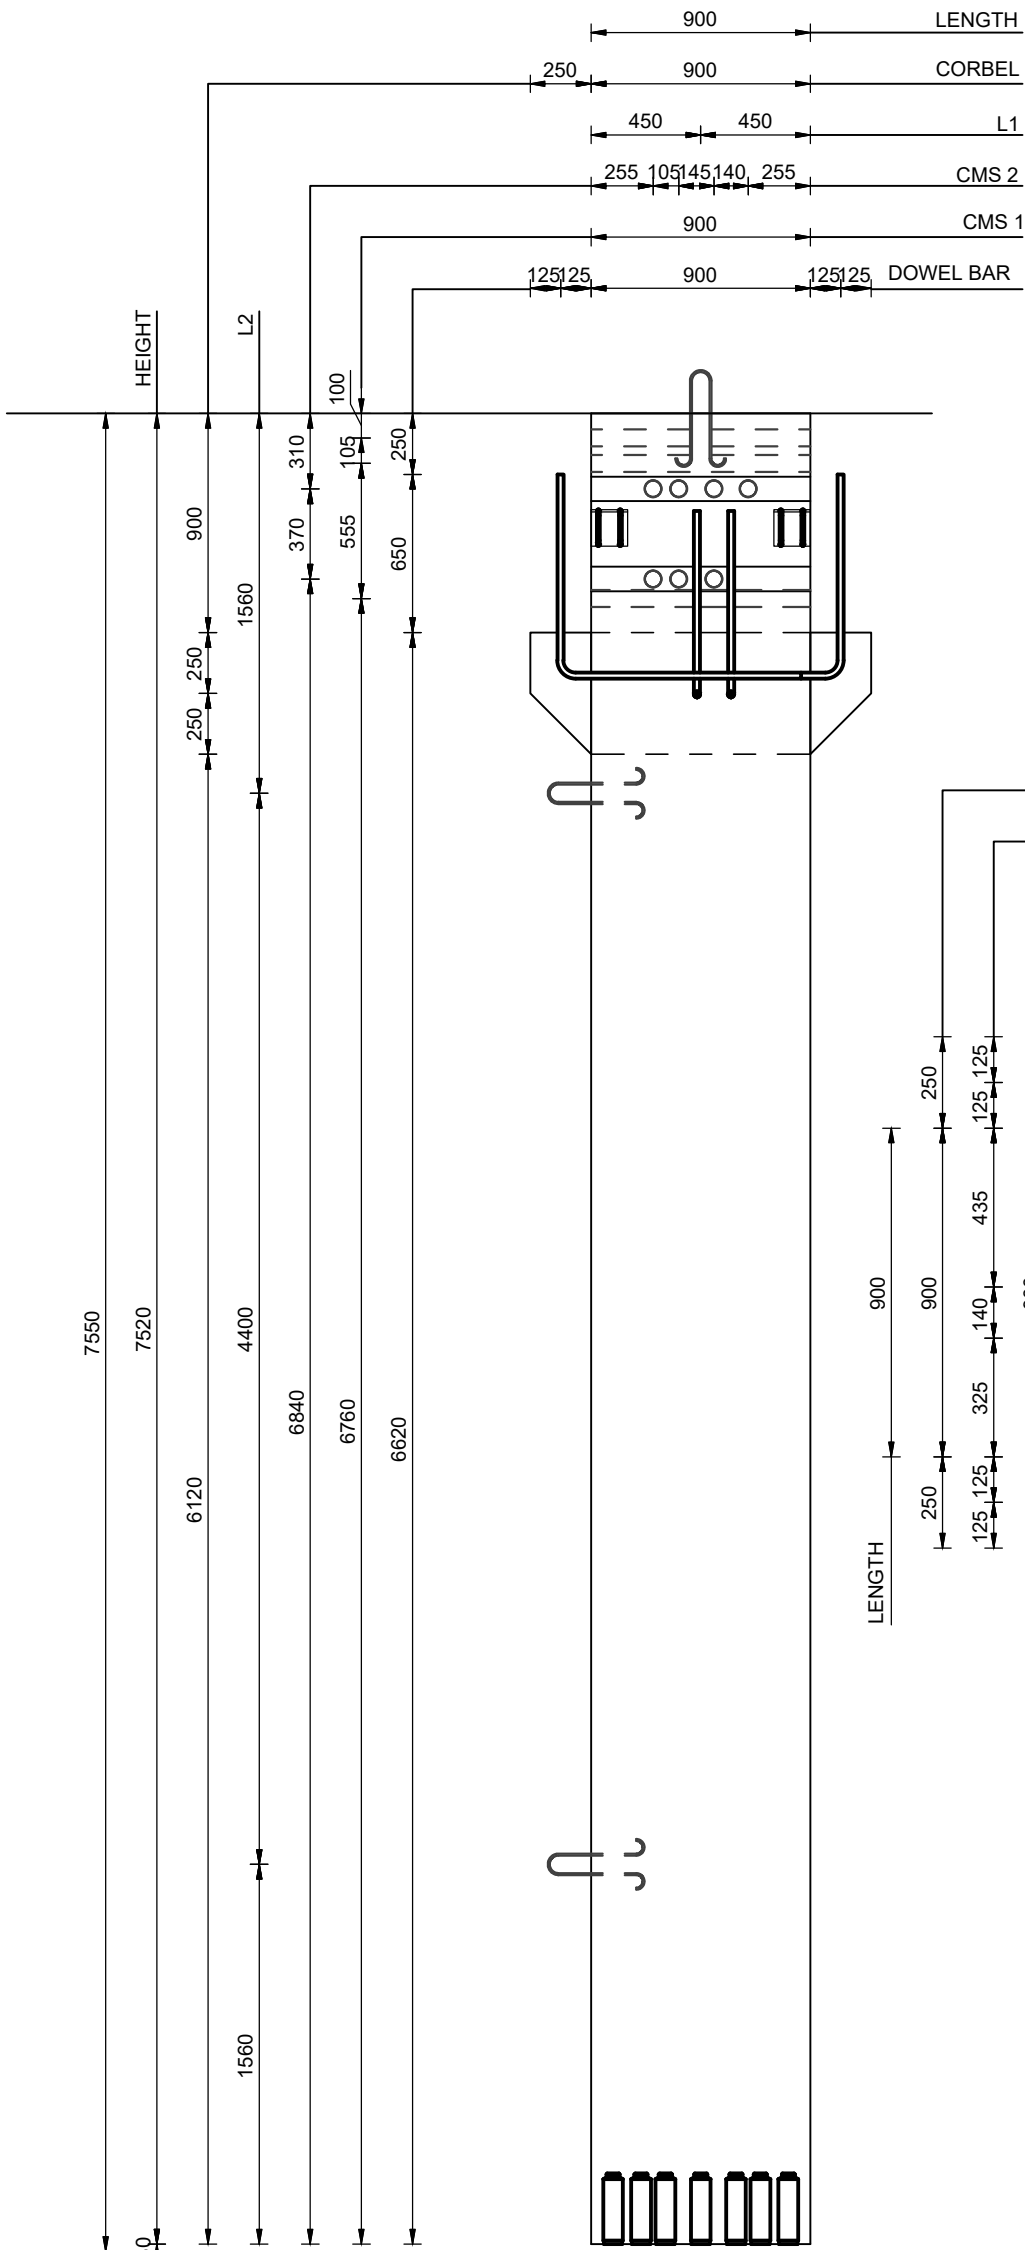
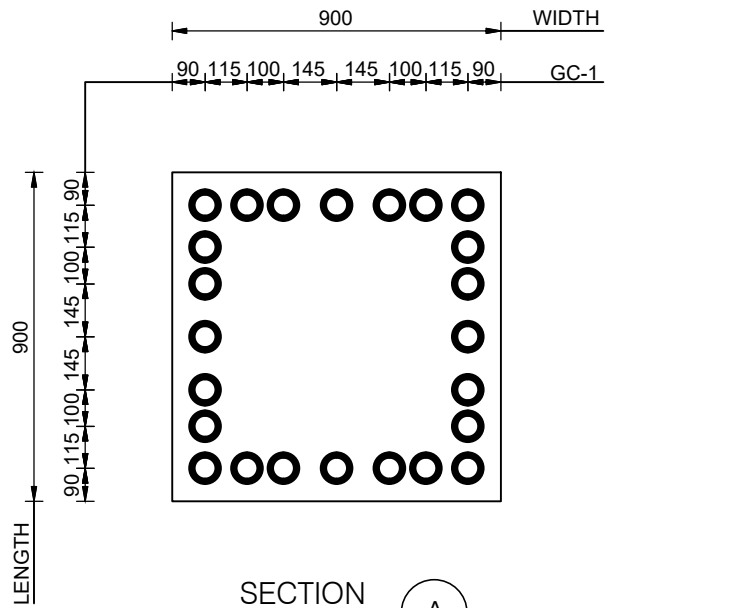





DETAILS OF PRECAST COLUMN
SCALE = 1 : 30




ELEVATION C
SCALE - 1 : 30



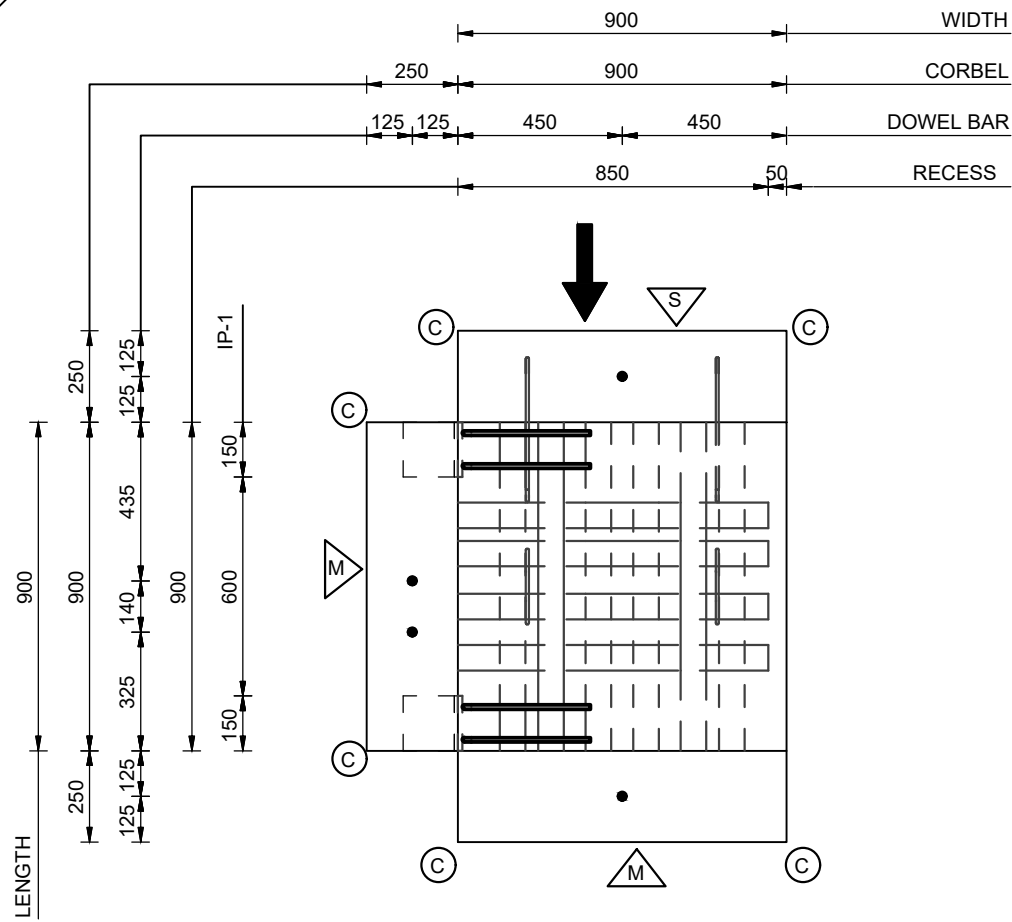SECTION A
SCALE - 1 : 20




SECTION B
SCALE - 1 : 20

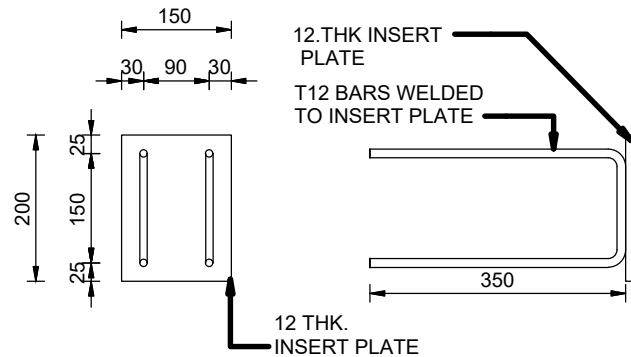


DETAILS OF INSERT PLATE IP1

DETAILS OF IP1					
PLATE PROFILE	WT OF PLATE / IP IN KG	DIA OF LUGS	NO. OF LUGS / IP	TOTAL LENGTH OF LUGS / IP IN METER	TOTAL LUGS WEIGHT / IP IN KG
150X200X12	2.82	12	2	1.80	1.60

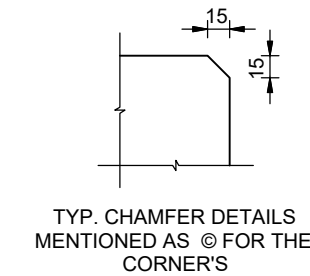

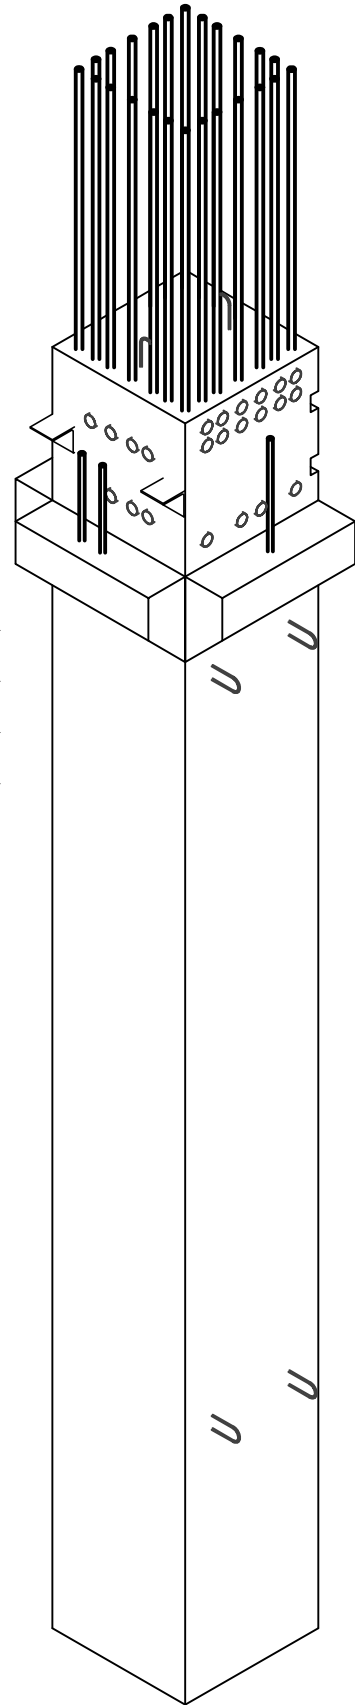TYP. CHAMFER DETAILS
MENTIONED AS @ FOR THE
CORNER'S




3D VIEW

- LEGEND:-
- RAKED SURFACE
 - SMOOTH FINISH
 - MOULD FINISH
 - CHAMFER 15x15
 - ERECTION MARK / VIEW DIRECTION


- NOTES:
- ALL DIMENSIONS ARE IN MM AND FOLLOW WRITTEN DIMENSIONS, DO NOT MEASURE.
 - CLEAR COVER FOR :
 - A. PRECAST COLUMN = 60mm
 - B. PRECAST COLUMN CORBEL = 30mm
 - GRADE OF REINFORCING STEEL, Fe 550D -TMT BARS CONFORMING TO IS1786:2008 WITH MINIMUM YIELD STRENGTH OF 550 N/mm²
 - CONCRETE STRENGTH :
 - A. AFTER 28 DAYS : @ M70
 - B. DEMOULDING & LIFTING : @ M20
 - C. TRANSPORTATION & ERECTION : @ M50

DEMOLDING METHOD	: HORIZONTAL
STACKING METHOD	: HORIZONTAL
TRANSPORT METHOD	: HORIZONTAL
ERECTION METHOD	: NO. OF LIFFTER AS PER SHOP DRAWING

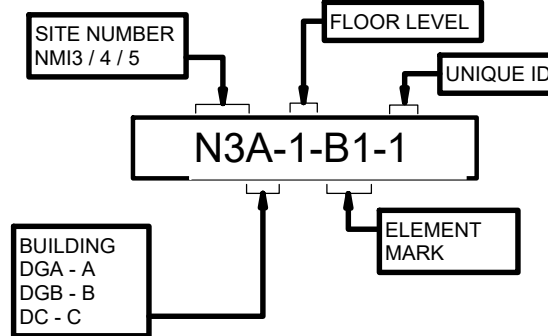

MARK	DESCRIPTION	QTY.
CMS1	80 DIA CORRUGATED METAL SLEEVE	16
CMS-2	80 DIA CORRUGATED METAL SLEEVE	7
GC-1	Ø32 GROUT COUPLER 'L' TYPE	24
IP-1	150X200X12 THK. PLATE	2
ISA1	ISA150x150x10	2
L1	LIFTER-15 TON CAPACITY EACH	2
L2	LIFTER-10 TON CAPACITY EACH	4
Grand total: 57		

PRECAST COLUMN VOLUME (M ³)	PRECAST COLUMN WEIGHT (TONNES)
6.27	16.61

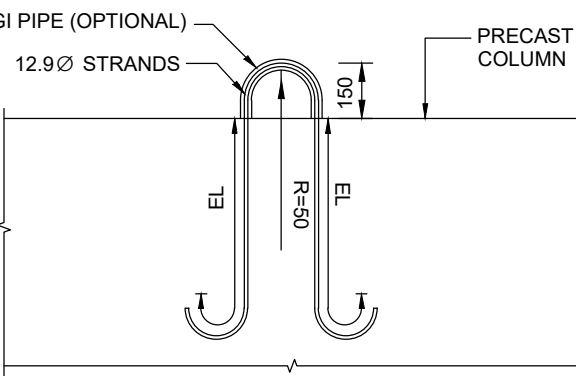

TYPICAL LIFTER DETAIL

(REFER STANDARRD LIFTING DETAILS
DRAWING FOR LIFTER CAPACITY)

REFERENCE DRAWING

DRAWING NO.	DESCRIPTION
N3C-2-C15 -RF	REINFORCEMENT DETAILS OF PRECAST COLUMN-N3C-2-C15
N3C-2-C15 -RF1	REINFORCEMENT DETAILS OF PRECAST COLUMN-N3C-2-C15

REV.	DATE	GOOD FOR CONSTRUCTION	DRAWN BY	CHECKED BY	APPROVED BY
R0	25-06-2026	GOOD FOR CONSTRUCTION	RGM	SAM	SDK









REVISION HISTORY	
STRUCTURAL CONSULTANT :	PPS ENGINEERING CONSULTANTS LLP.
FIRST FLOOR, SERVICE BUILDING, BAIF BHAVAN, DR. MANIBHAI DESAI NAGAR, WARJE, PUNE-411058, INDIA. EMAIL : design@ppepl.in	
WEB SITE : www.ppepl.in Tel. : + 91 20 25232858	

PROJECT NUMBER	25-4035
PROJECT NAME	ACXNMI-03
CLIENT	ADANICONNEX

DETAILS OF PRECAST COLUMN : N3C-2-C15

ELEMENT NO.	REQUIRED NO.
N3C-2-C15	01
TOTAL	01

DWG NUMBER	N3C-2-C15-F
APPROVAL	NAME DATE SCALE : AS SHOWN
TENDER	DRAWN : RGM 25-06-2026
CONSTRUCTION	CHECKED : SAM 25-06-2026
INFORMATION	APPROVED : SDK 25-06-2026
REV. : R0	SIZE : A2

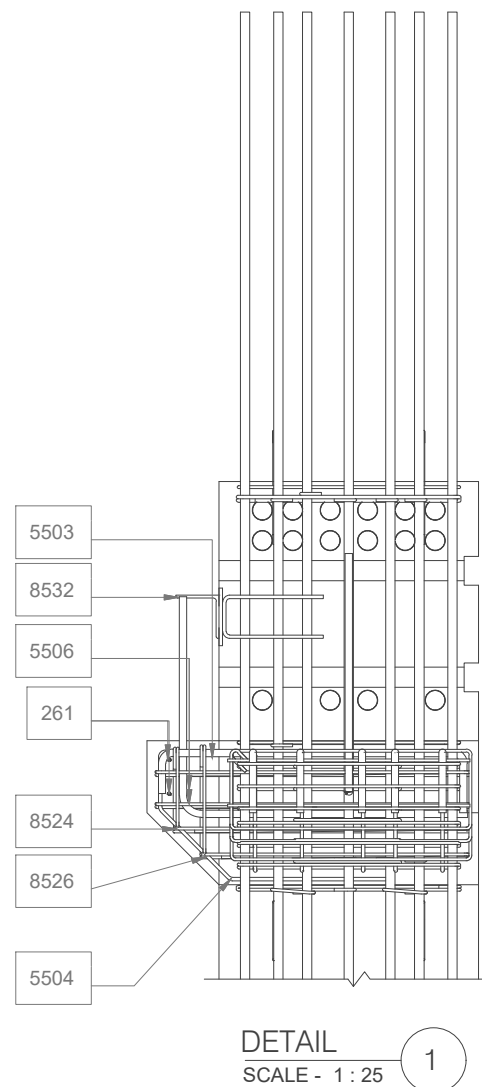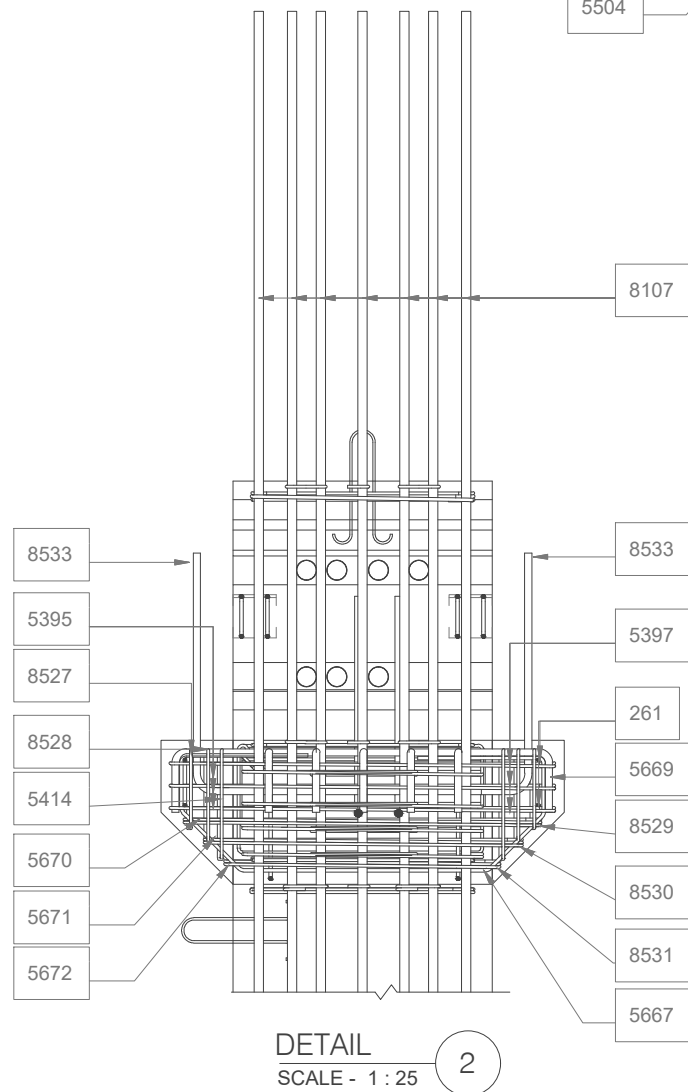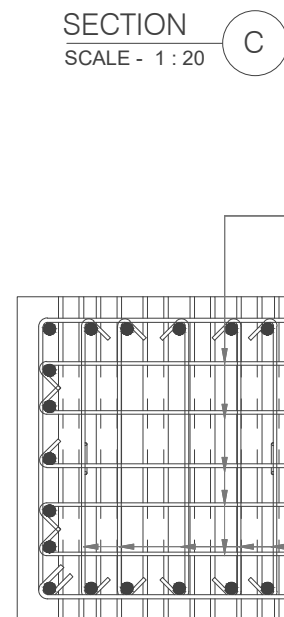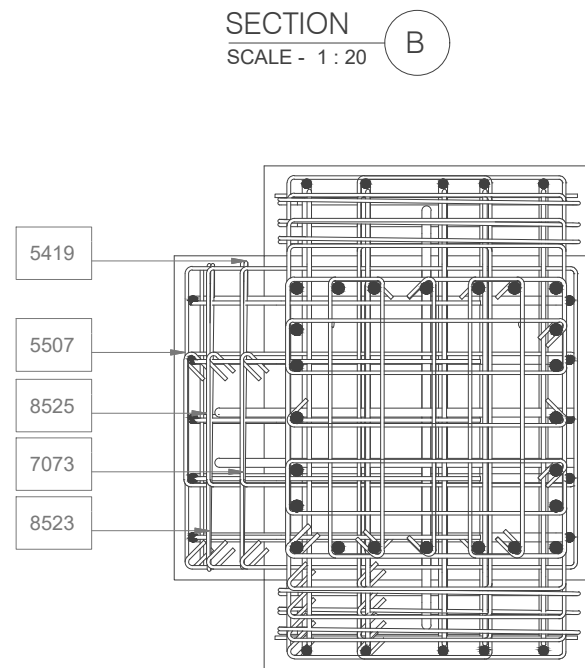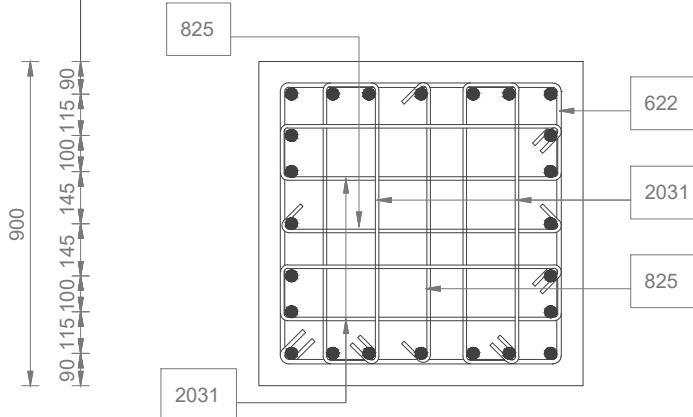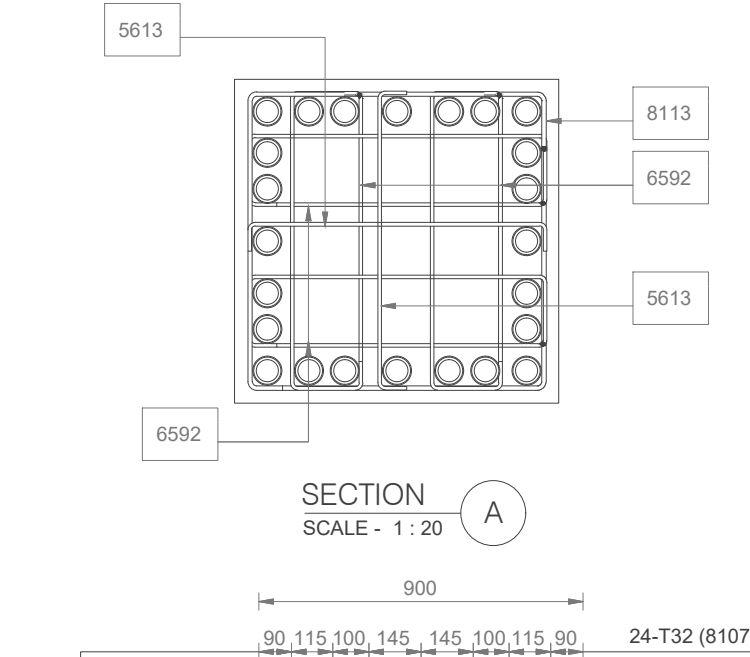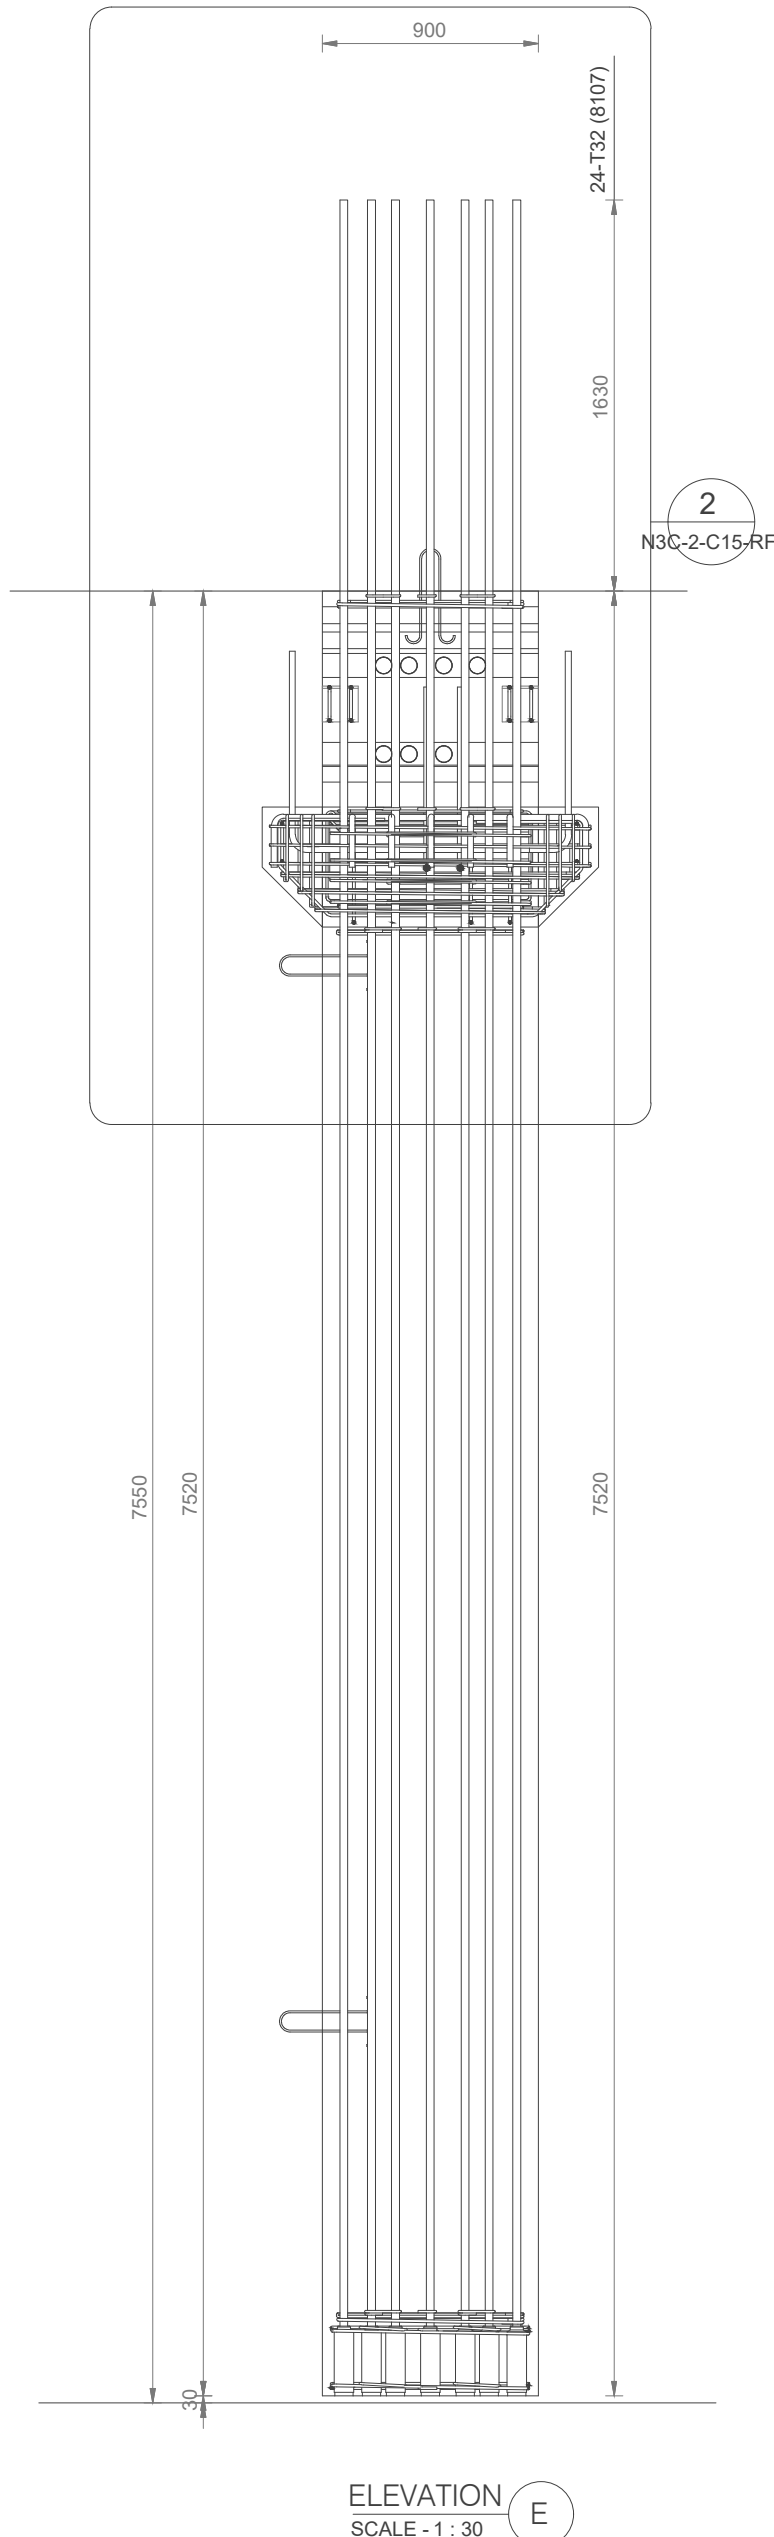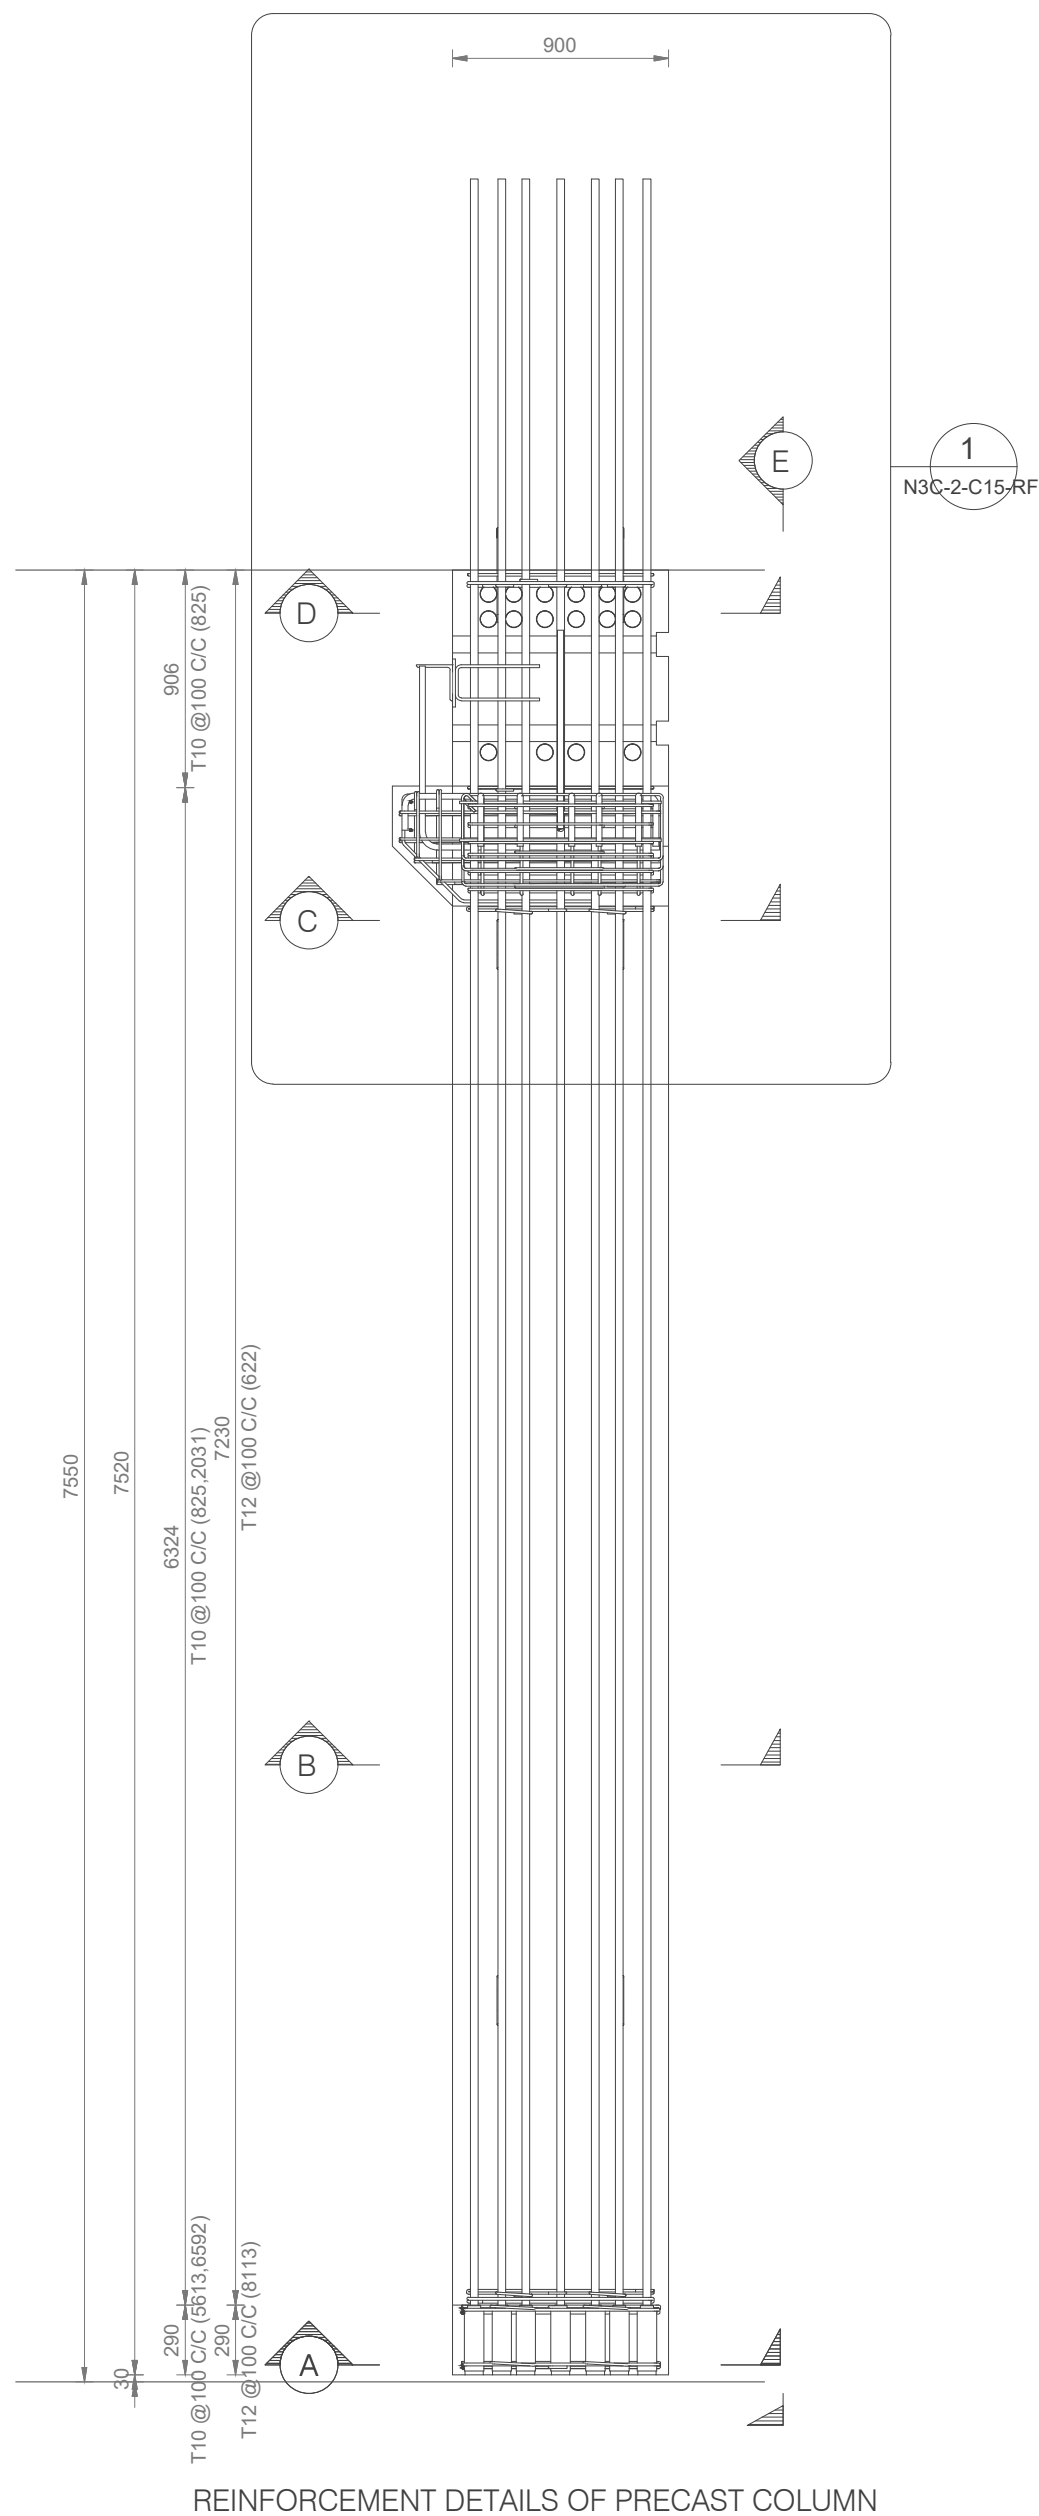

REINFORCEMENT DETAILS OF PRECAST COLUMN
















ELEVATION E
SCALE - 1 : 30
















SECTION D
SCALE - 1 : 20

DETAIL 2
SCALE - 1 : 25

DETAIL 1
SCALE - 1 : 25

R0	25-06-2026	GOOD FOR CONSTRUCTION	RGM	SAM	SDK
REV.	DATE	DRAWING STATUS	DRAWN BY	CHECKED BY	APPROVED BY
REVISION HISTORY					
STRUCTURAL CONSULTANT : PPS ENGINEERING CONSULTANTS LLP.					
FIRST FLOOR, SERVICE BUILDING, BAFI BHAVAN, DR. MANISHAI DESAI NAGAR, WARJE, PUNE 411058, INDIA. EMAIL : design@ppspl.in					
WEB SITE : www.ppspl.in Tel. : + 91 20 25232858					
PROJECT NUMBER			25-4035		
PROJECT NAME			ACXNMI-03		
CLIENT			ADANICONNEX		
REINFORCEMENT DETAILS OF PRECAST COLUMN :			N3C-2-C15		
DWG NUMBER			N3C-2-C15-RF		
REVISIONS	APPROVAL	NAME	DATE	SCALE	AS SHOWN
	TENDER	RGM	25-06-2026	SCALE	AS SHOWN
	CONSTRUCTION	CHECKED	SAM	25-06-2026	SIZE : A2
	INFORMATION	APPROVED	SDK	25-06-2026	REV. : R0

N3C-2-C15 REBAR SCHEDULE													
			BENDING DIMENSIONS										
BAR MARK	BAR DIAMETER	QTY	BENDING DETAILS	A	B	C	C1	C2	D	D1	BAR CUTTING LENGTH	TOTAL BAR LENGTH	TOTAL WEIGHT
261	10	6		840	0	0			0		840	5100	3.15 kg
622	12	73		780	780	96			96		3253	239075	212.52 kg
825	10	234		80	776	80			0		936	222300	137.23 kg
2031	10	236		155	780	80			80		1981	472000	291.38 kg
5395	10	3		1342	374	80			80		3543	10650	6.57 kg
5397	10	3		1342	775	80			80		4344	13050	8.06 kg
5414	10	2		839	387	80			80		2563	5150	3.18 kg
5419	10	1		855	380	80			105		2605	2625	1.62 kg
5503	25	5		220	1070	154			0		1362	6875	26.53 kg
5504	12	5		467	207	349	564	0	0		1556	7875	7.00 kg
5506	10	2		840	1090	80			80		3971	7950	4.91 kg
5507	10	2		1093	374	80			80		3045	6100	3.77 kg
5613	10	8		80	830	80			0		957	7800	4.82 kg
5667	12	5		443	206	277	863	297	200	445	2668	13375	11.89 kg
5669	25	5		220	1321	213			0		1672	8375	32.31 kg
5670	10	1		1245	374	80			80		3349	3350	2.07 kg
5671	10	1		1112	374	80			80		3082	3100	1.91 kg

N3C-2-C15 REBAR SCHEDULE													
			BENDING DIMENSIONS										
BAR MARK	BAR DIAMETER	QTY	BENDING DETAILS	A	B	C	C1	C2	D	D1	BAR CUTTING LENGTH	TOTAL BAR LENGTH	TOTAL WEIGHT
5672	10	1		962	374	80			80		2783	2800	1.73 kg
6592	10	16		200	830	80			80		2138	34400	21.24 kg
7073	10	1		937	374	80			80		2734	2750	1.70 kg
8107	32	24		8895	0	0			0		8895	213600	1375.68 kg
8113	12	4		828	828	96			96		3405	13700	12.18 kg
8523	10	1		855	280	80			105		2405	2425	1.50 kg
8524	10	1		840	1030	80			80		3851	3875	2.39 kg
8525	10	1		1030	374	80			80		2920	2925	1.81 kg
8526	10	1		840	937	80			80		3665	3675	2.27 kg
8527	10	2		840	280	80			80		2351	4750	2.93 kg
8528	10	2		840	323	80			80		2436	4900	3.02 kg
8529	10	1		1245	775	80			80		4151	4175	2.58 kg
8530	10	1		1112	775	80			80		3884	3900	2.41 kg
8531	10	1		962	775	80			80		3585	3600	2.22 kg
8532	25	2		1000	766	0			0		1714	3450	13.31 kg
8533	25	2		1000	839	0			0		1788	3600	13.89 kg
653												1343275	2219.76 kg

N3C-2-C15 REBAR SCHEDULE SUMMARY		
BAR DIAMETER	TOTAL BAR LENGTH	TOTAL WEIGHT
10	833350	514.45 kg
12	274025	243.59 kg
25	22300	86.04 kg
32	213600	1375.68 kg
1343275		2219.76 kg

R0	25-06-2026	GOOD FOR CONSTRUCTION	RGH	SAM	SDK	
REV.	DATE	DRAWING STATUS	DRAWN BY	CHECKED BY	APPROVED BY	
REVISION HISTORY						
STRUCTURAL CONSULTANT :		PPS ENGINEERING CONSULTANTS LLP.				
		FIRST FLOOR, SERVICE BUILDING, BAFI BHAVAN, DR. MANIBHAI DESAI NAGAR, WARJE, PUNE 411058, INDIA. E-MAIL : design@ppsi.in WEB SITE : www.ppspl.in Tel. : + 91 20 25232858				
PROJECT NUMBER		25-4035				
PROJECT NAME		ACXNMI-03				
		CLIENT				
		ADANICONNEX				
REINFORCEMENT DETAILS OF		N3C-2-C15				
PRECAST COLUMN :						
DWG NUMBER		N3C-2-C15-RF1				
RELEASED FOR TENDER	APPROVAL		NAME	DATE	SCALE : AS SHOWN	
	TENDER		RGH	25-06-2026		
	CONSTRUCTION	✓	SAM	25-06-2026		
	INFORMATION		APPROVED	SDK	25-06-2026	SIZE : A2
					REV. : R0	