




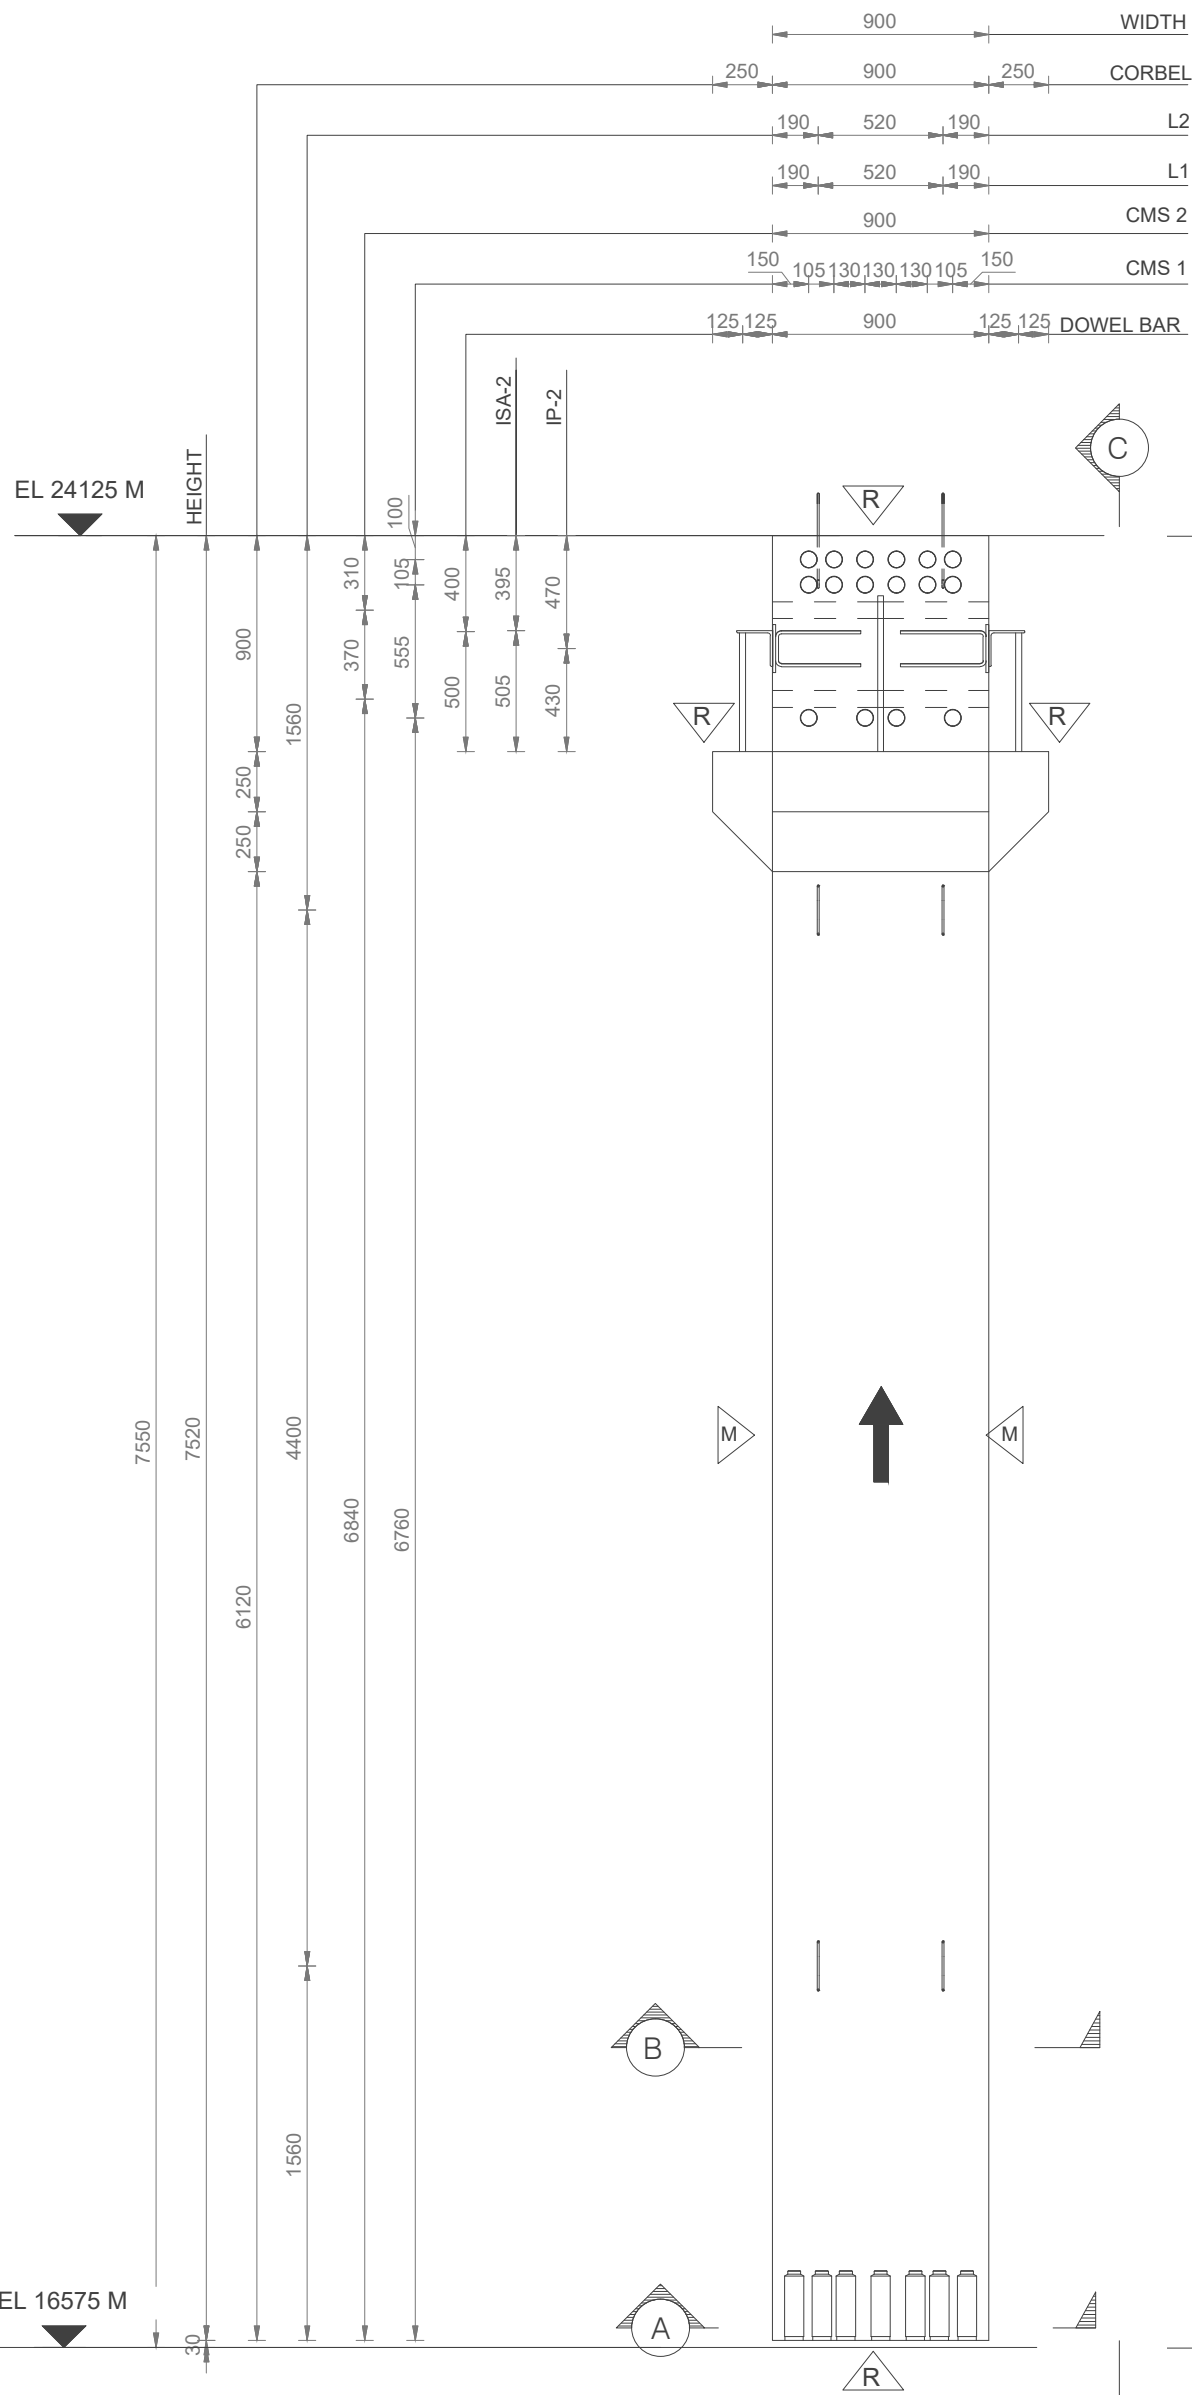


DETAIL OF PRECAST COLUMN
SCALE = 1 : 30

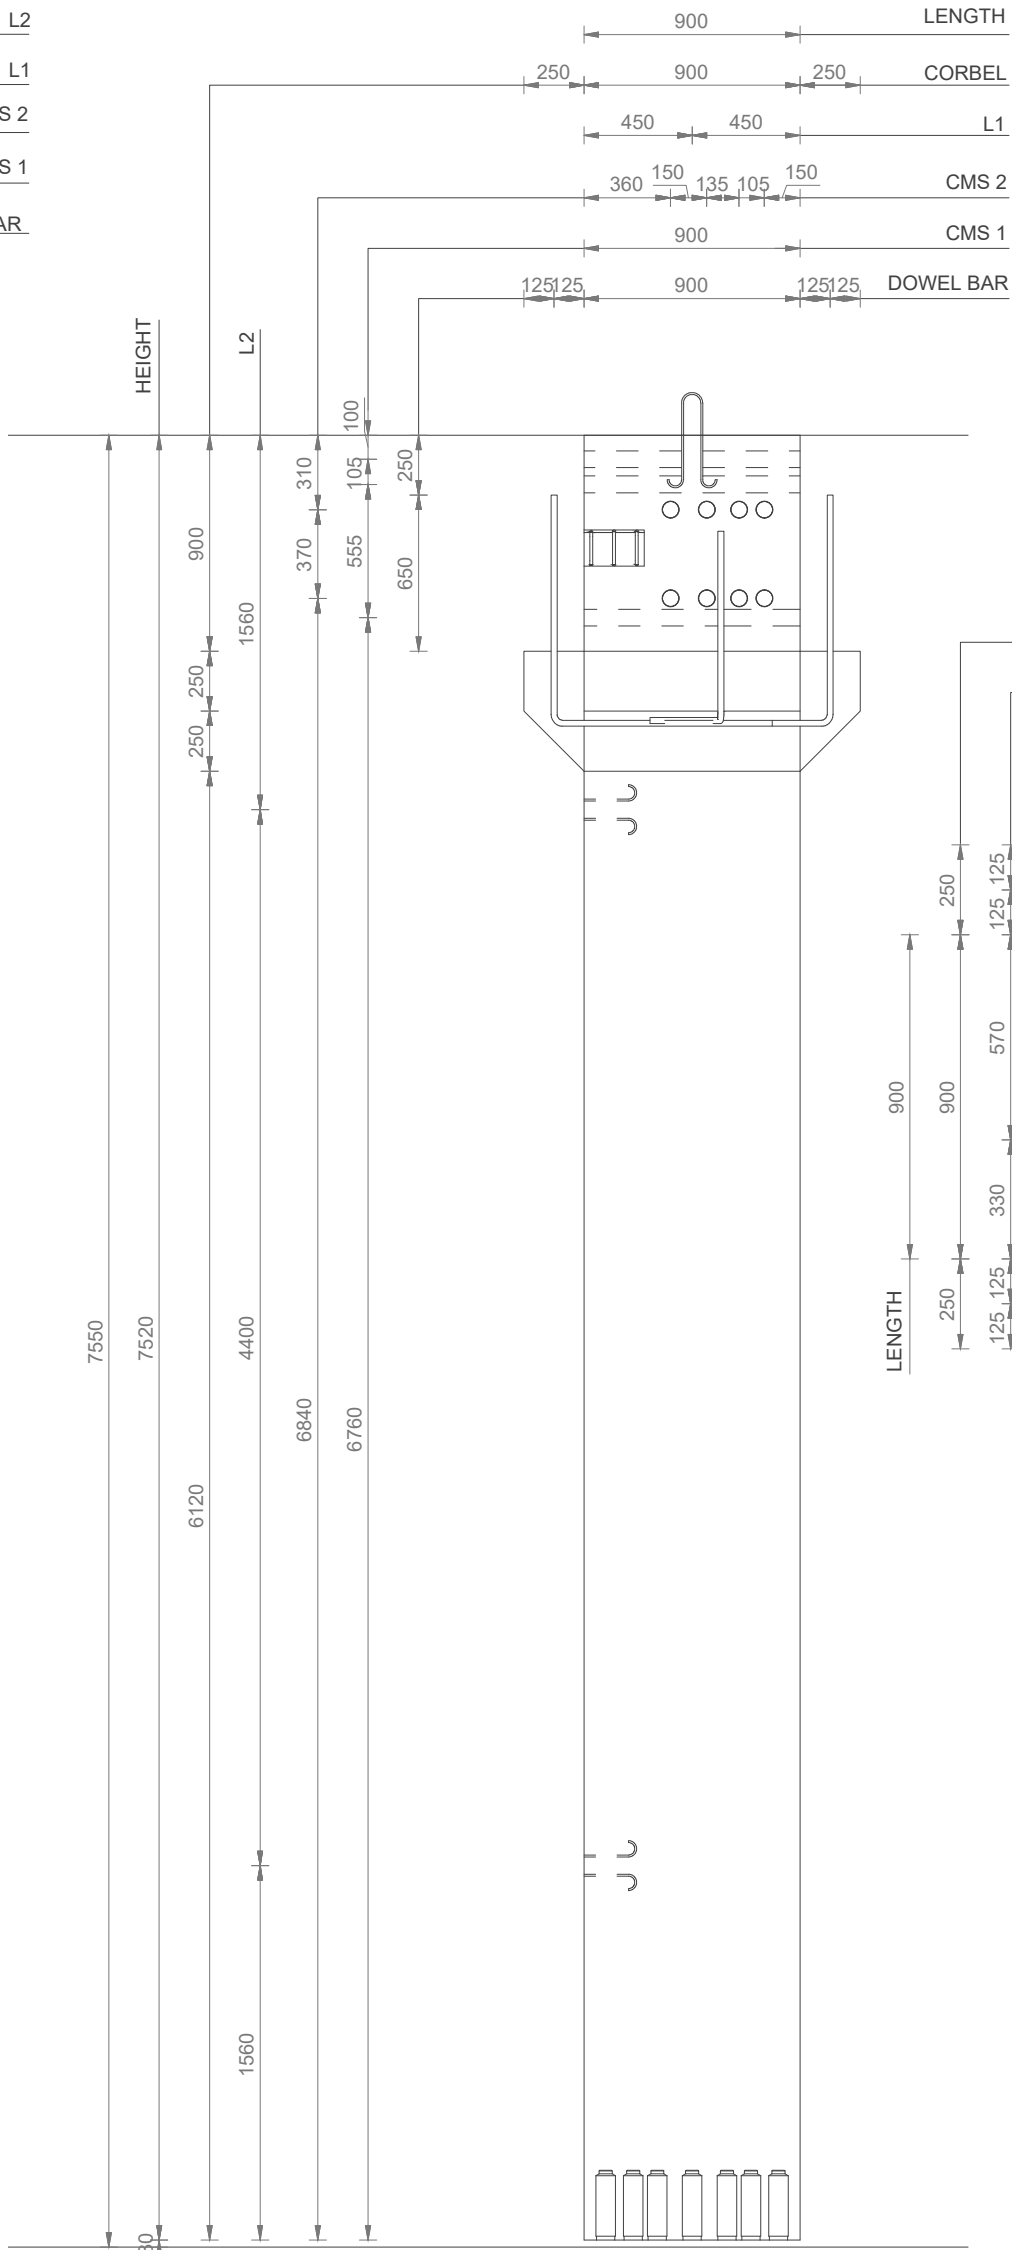


ELEVATION
SCALE = 1 : 30

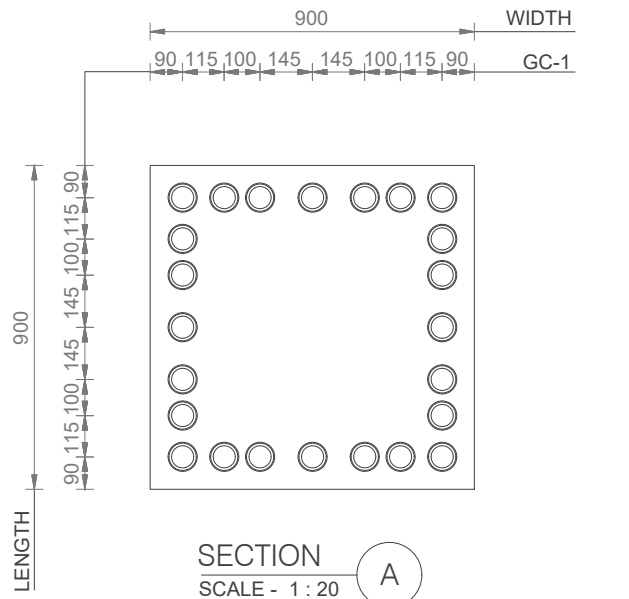

SECTION
SCALE - 1 : 20

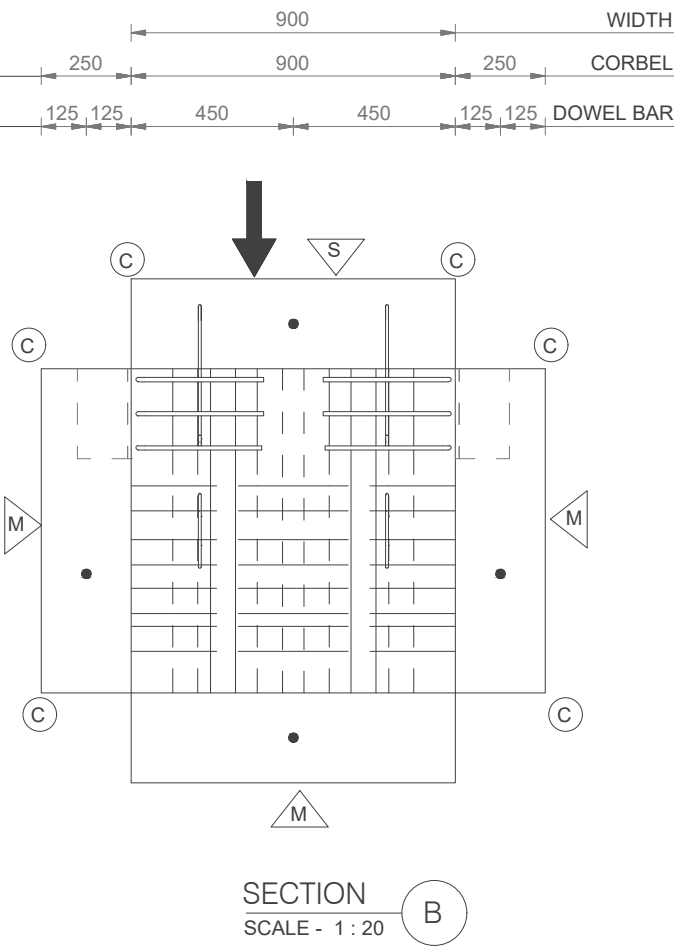


SECTION
SCALE - 1 : 20

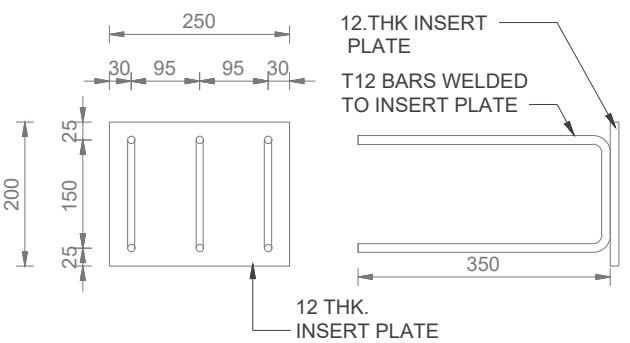

DETAILS OF INSERT PLATE IP2

DETAILS OF IP2					
PLATE PROFILE	WT OF PLATE / IP IN KG	DIA OF LUGS	NO. OF LUGS / IP	TOTAL LENGTH OF LUGS / IP IN METER	TOTAL LUGS WEIGHT / IP IN KG
250X200X12	4.71	12	3	2.55	2.66

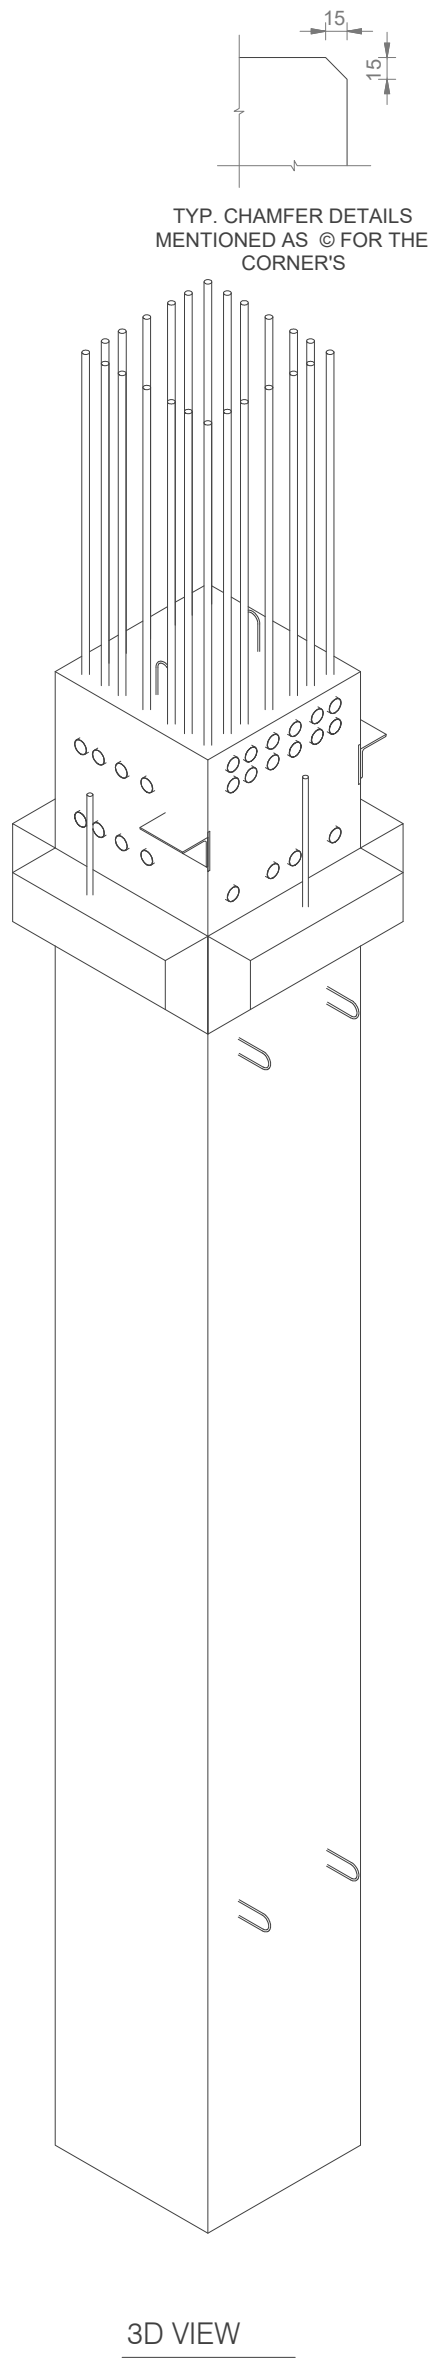


3D VIEW

ELEMENT NO.	REQUIRED NO.
N3C-2-C18	01
TOTAL	01

- LEGEND:-**
- RAKED SURFACE
 - SMOOTH FINISH
 - MOULD FINISH
 - CHAMFER 15x15
 - ERECTION MARK / VIEW DIRECTION


- NOTES:**
- ALL DIMENSIONS ARE IN MM AND FOLLOW WRITTEN DIMENSIONS, DO NOT MEASURE.
 - CLEAR COVER FOR :
 - A. PRECAST COLUMN = 60mm
 - B. PRECAST COLUMN CORBEL = 30mm
 - GRADE OF REINFORCING STEEL, Fe 550D -TMT BARS CONFORMING TO IS1786:2008 WITH MINIMUM YIELD STRENGTH OF 550 N/mm²
 - CONCRETE STRENGTH :
 - A. AFTER 28 DAYS : @ M70
 - B. DEMOULDING & LIFTING : @ M20
 - C. TRANSPORTATION & ERECTION : @ M50

DEMOULDING METHOD	: HORIZONTAL
STACKING METHOD	: HORIZONTAL
TRANSPORT METHOD	: HORIZONTAL
ERECTION METHOD	: NO. OF LIFTER AS PER SHOP DRAWING

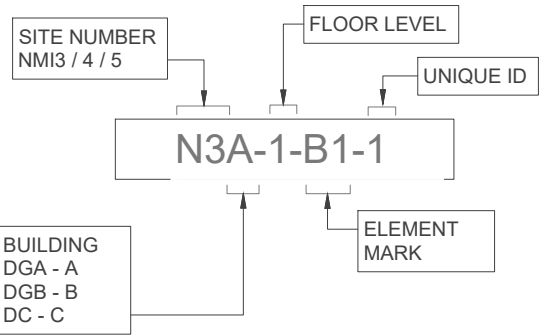

MARK	DESCRIPTION	QTY.
CMS-1	70 DIA PIC SLEEVE	16
CMS-2	70 DIA PIC SLEEVE	8
GC-1	Ø32 GROUT COUPLER 'L' TYPE	24
IP-2	250X200X12 THK. PLATE	2
ISA-2	ISA150x150x10	2
L1	LIFTER-15 TON CAPACITY EACH	2
L2	LIFTER-10 TON CAPACITY EACH	4
Grand total: 58		

PRECAST COLUMN VOLUME (M ³)	PRECAST COLUMN WEIGHT (TONNES)
6.36	16.85

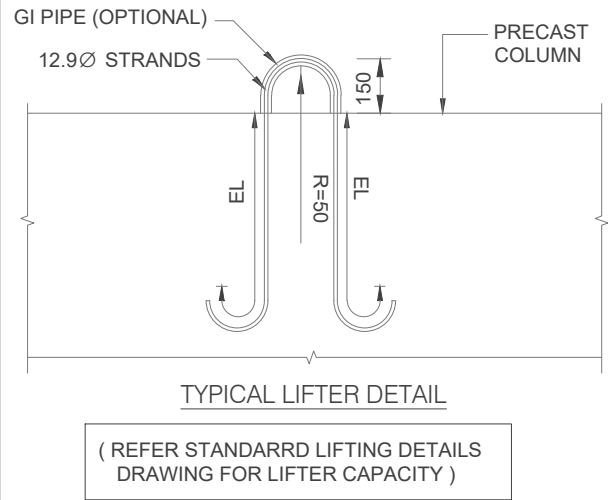

(REFER STANDARRD LIFTING DETAILS DRAWING FOR LIFTER CAPACITY)

REFERENCE DRAWING

DRAWING NO.	DESCRIPTION
N3C-2-C18 -RF	REINFORCEMENT DETAILS OF PRECAST COLUMN -N3C-2-C18
N3C-2-C18 -RF1	REINFORCEMENT DETAILS OF PRECAST COLUMN -N3C-2-C18

REV.	DATE	DRAWING STATUS	DRAWN BY	CHECKED BY	APPROVED BY
R0	02-07-2026	GOOD FOR CONSTRUCTION	SPS	SAM	SDK

REVISION HISTORY	
STRUCTURAL CONSULTANT	PPS ENGINEERING CONSULTANTS LLP.
FIRST FLOOR, SERVICE BUILDING, BAFI BHAVAN, DR. MANISHAI DESAI NAGAR, WARJE, PUNE 411058, INDIA. EMAIL : design@ppspl.in WEB SITE : www.ppspl.in Tel. : + 91 20 25232858	

PROJECT NUMBER	25-4035
PROJECT NAME	ACXNMI-03
CLIENT	ADANICONNEX

DETAILS OF PRECAST COLUMN : N3C-2-C18

DWG NUMBER		N3C-2-C18-F					
RELEASED FOR	APPROVAL			NAME	DATE	SCALE : AS SHOWN	REV. : R
	TENDER		DRAWN	SPS	02-07-2026		
	CONSTRUCTION	✓	CHECKED	SAM	02-07-2026	SIZE : A2	
	INFORMATION		APPROVED	SDK	02-07-2026		